


开门电机 Door Motor 60W



- 电机参数不同，电机性能及使用寿命不同。故应慎重选型，正确使用。
- 不能正确使用是造成故障的主要原因。订货时，在确认电机参数后，选择正确的型号进行订货。
- If the motor parameters are different, the motor performance and its service life are different. Be careful in selection of motor model for a correct use.
- Wrong capacitor capacitance is the cause of trouble. You must confirm a correct voltage and select a correct model when your purchase order is placed.

电机外形尺寸 Overall Dimension of Motor

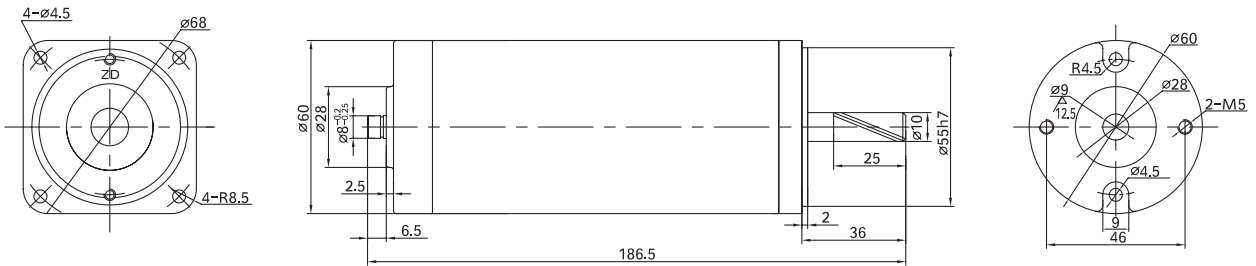


齿轮箱允许力矩 Allowable Torque on Gearbox

齿轮箱型式 Model of Gearbox: 2GN □ K

型号 Model	减速比 Reduction Ratio	输出轴转速 Output Shaft Speed r/min	允许力矩 Allowable Torque N.m/kgf.cm
Z2D60-90 □	8.5	252	1.84/18.8

接线方式 Wiring Mode



电机接线图 Wiring Diagram of Motor
 转向：红“+”，黑“-”时，从轴伸端看为顺时针
 Rotation: When red "+" and black "-", it is clockwise from the end of shaft extension.

电机性能参数 Motor Performance Parameters

型号 Model	电压 Voltage V	功率 Power W	空载参数 No-load Parameters		负载参数 Load Parameters			电刷寿命 Brush Life H	电机重量 Motor Weight kg	备注 Remarks
			转速 Speed RPM	电流 Current A	转速 Speed RPM	力矩 Torque kg.cm	电流 Current A			
Z2D60-90 □	90	60	2150	0.2	1800	3.2	1.0	2000	1.2	